




Positioner for industrial valves

SMART POSITIONER min 3 bar

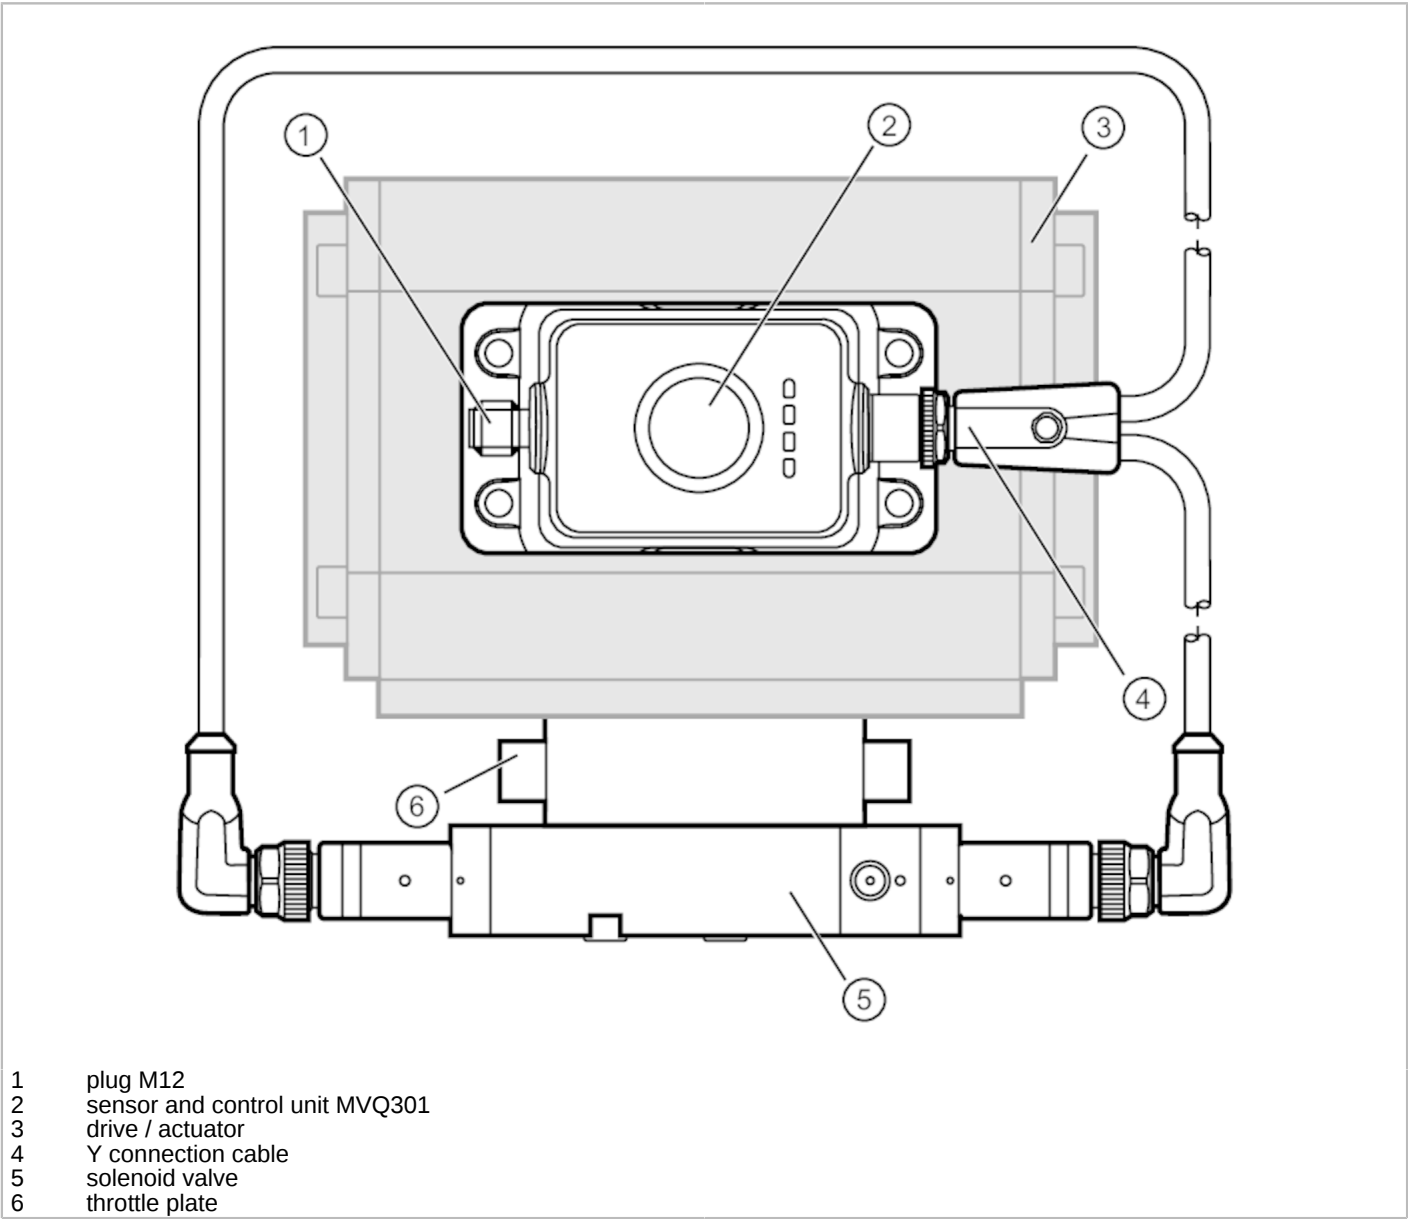

Application		
Application		suitable for double-acting cylinders
Interfaces		
Communication interface		IO-Link
Unterstützte Masterportklasse		B
Mechanical data		
Weight	[g]	943.6
Operating pressure range	[bar]	2.5...8

ZZ0688



Positioner for industrial valves

SMART POSITIONER min 3 bar

Accessories	
Items supplied	position sensor and control unit: 1, MVQ301
	5/3-way solenoid valve with defined home position: 1, ZJF119
	throttle plate: 1, ZJF122
	Connection cable: 1, EVC508
	silencer: 2
	with mounting material
Remarks	
Pack quantity	1 pcs.