


E12360



连接电缆


VDOGH080MSS0010H08STGH080MSS

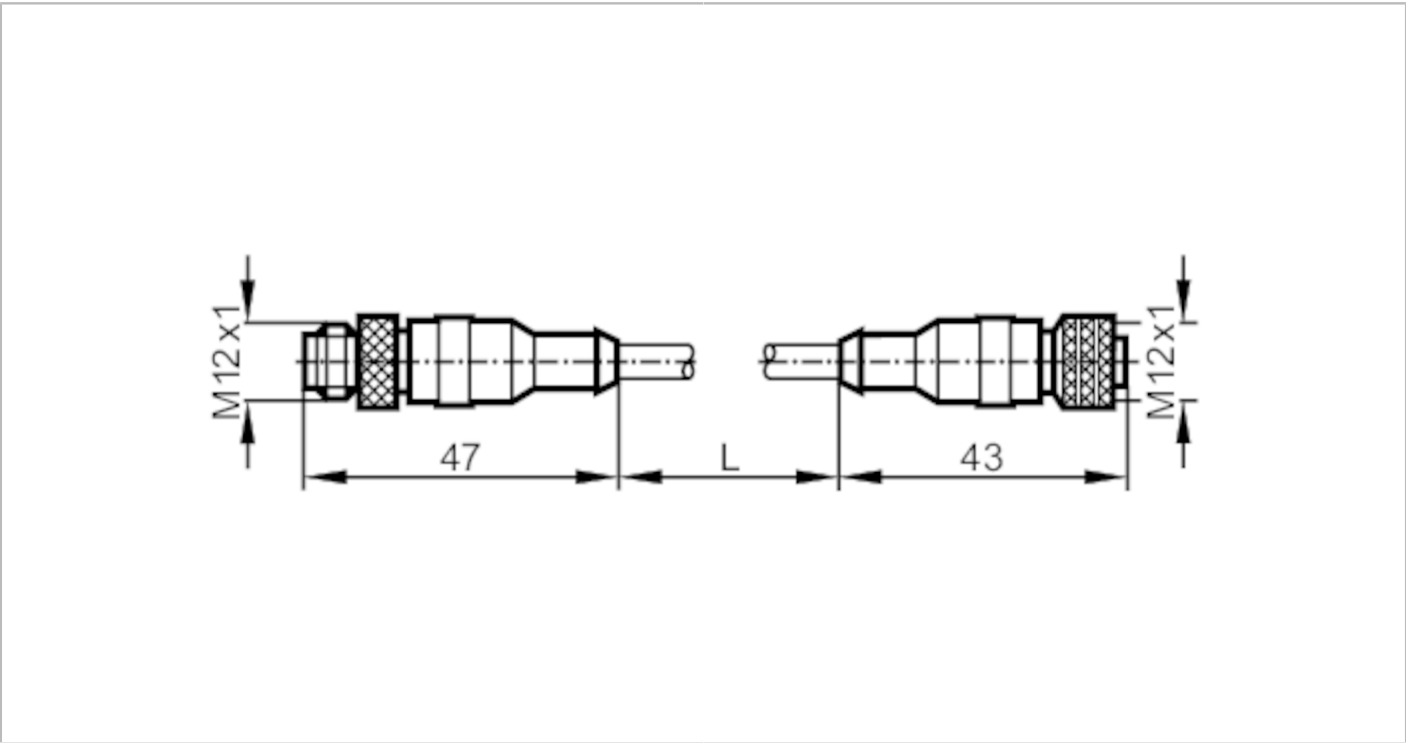

应用	
特殊的性能	无卤素
电气数据	
工作电压	[M] < 30 AC / < 36 DC
工作条件	
环境温度	[°C] -25...80
外壳防护等级	IP 68
机械技术数据	
重量	[g] 617.5
原材料	PUR
模制主体材料	PUR
滚花螺母的材料	黄铜, 镀镍的
注释	
包装单位	1 件

电气连接 - 插头

接插件: 1 x M12, 直型; 译码: A; 成型体: PUR; 锁定: 黄铜, 镀镍的; 拧紧扭矩: 0.7...0.9 Nm



E12360




连接电缆

VDOGH080MSS0010H08STGH080MSS

电气连接

电缆: 10 m, PUR, 无卤素, 黑色, Ø 6.8 mm; 8 x 0.25 mm²

接口

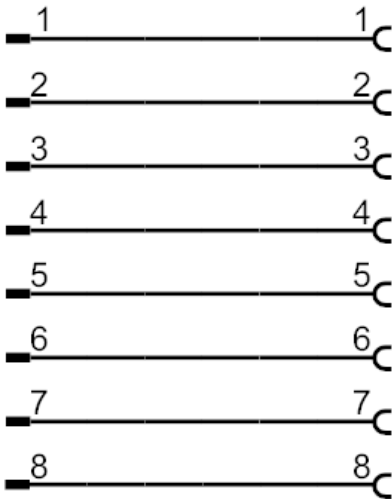

电气连接 - 插座

接插件: 1 x M12, 直型; 译码: A; 成型体: PUR; 锁定: 黄铜, 镀镍的; 拧紧扭矩: 0.7...0.9 Nm

