





分配盒

ZDO8H05HMSS0000-00STAK190MSS

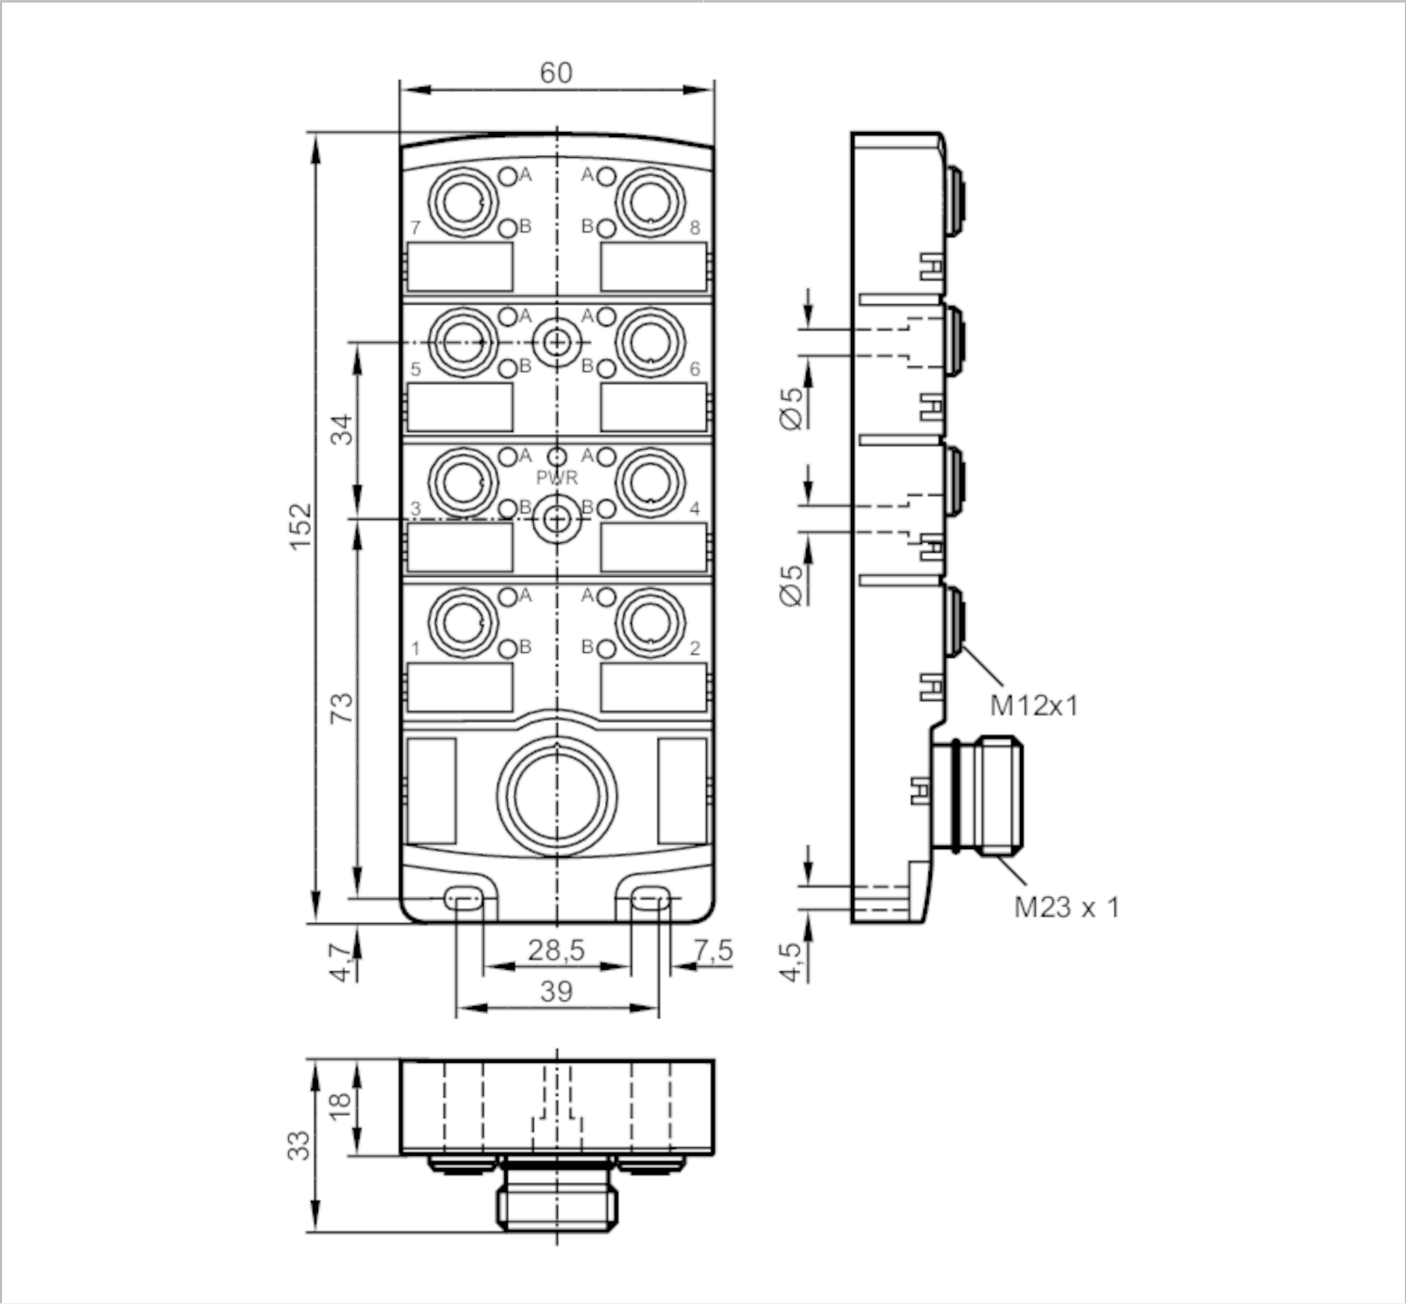

CE UL LISTED UK CA	
应用	
特殊的性能	无硅树脂；镀金触点
无硅树脂	有
电气数据	
工作电压	[V]10...30 DC；（符合cULus - Class 2标准）
每个模块/插槽最大电流负载	[A]4
当前负载总数最大值	[A]10
输出	
电气设计	PNP


接插件: 1 x M23; 成型体: PA; 触头: 镀金的; 拧紧扭矩: 0.8...1.5 Nm



The diagram shows a top-down view of a circular connector. It has 19 pins arranged in a circle. The pins are numbered 1 through 19. Pin 1 is at the top right, and the numbering continues clockwise. The connector has a central hub and a circular outer shell.



接口

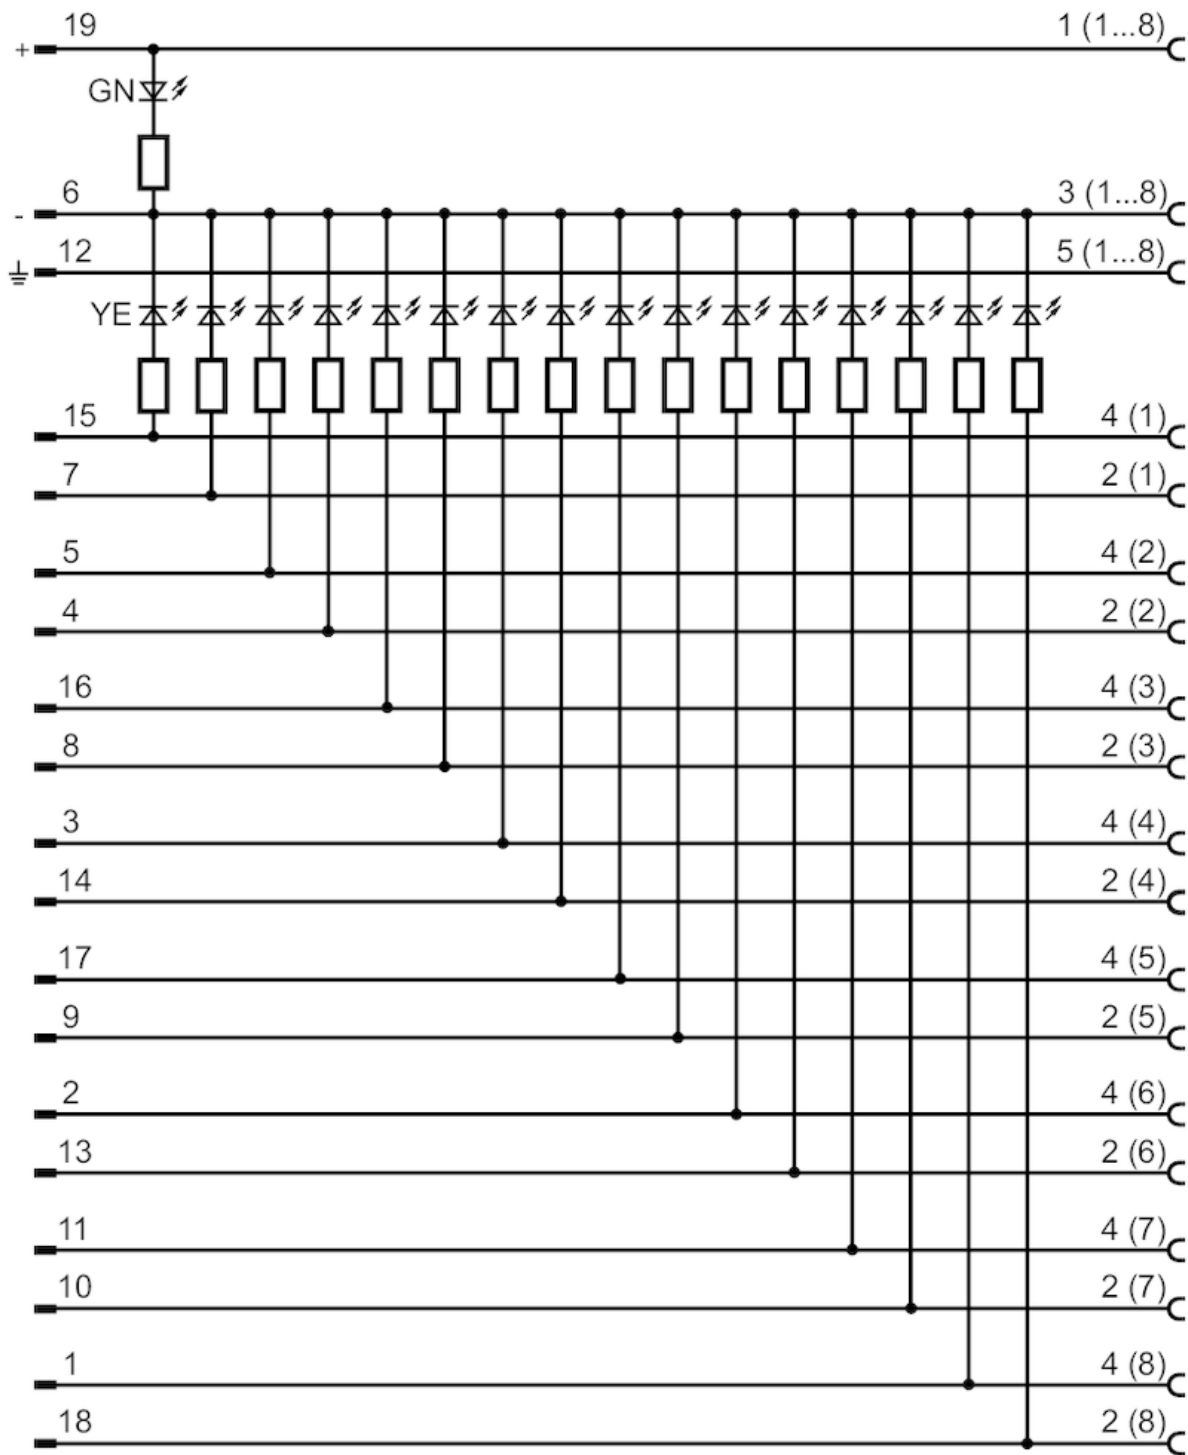



分配盒

ZDO8H05HMSS0000-00STAK190MSS

电气连接 - 插槽

接插件: 8 x M12; 译码: A; 成型体: PA; 触头: 镀金的; 拧紧扭矩: 0.8...1.5 Nm

